


320E Hydraulic Excavator Specifications

320E L Dimensions

All dimensions are approximate.

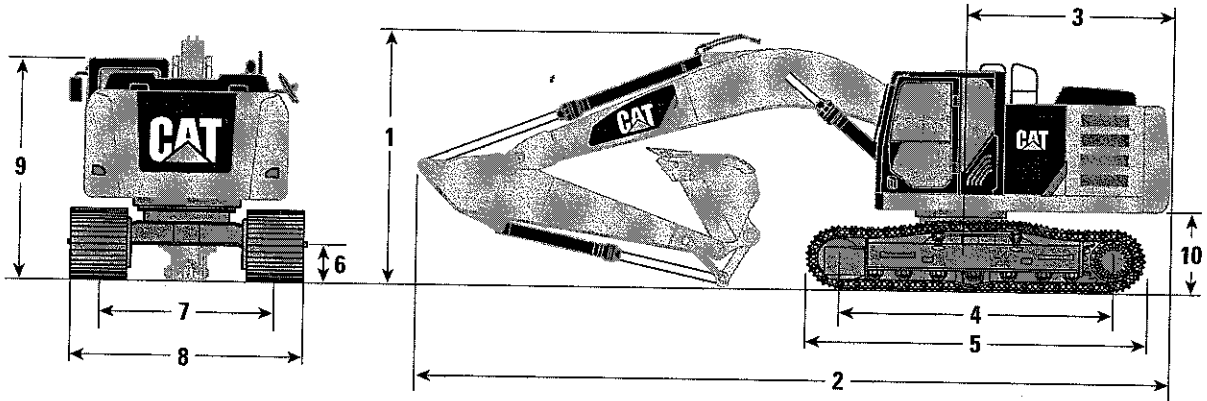

Stick	Reach Boom 5.7 m		Super Long Reach Boom 8.85 m	VA Boom	
	R2.9B1	R2.5B1	Super Long Reach 6.28 m	R2.9B1	R2.5B1
	mm	mm	mm	mm	mm
1 Shipping Height without Guard Rail*	3130	3051	3177	2970	3020
Shipping Height with Guard Rail	3240	3240	3240	3240	3240
Shipping Height with Top Guard, without Guard Rail	3152	3152	3152	3150	3152
2 Shipping Length	9540	9461	14 070	9780	9820
3 Tail Swing Radius	2830	2830	2830	2830	2830
4 Length to Center of Rollers	3650	3650	3650	3650	3650
5 Track Length	4455	4455	4455	4460	4455
6 Ground Clearance	450	450	450	450	450
7 Track Gauge	2380	2380	2380	2380	2380
8 Transport Width					
600 mm Shoes	2980	2980	2980	2980	2980
700 mm Shoes	3080	3080	3080	3080	3080
790 mm Shoes	3170	3170	3170	3170	3170
9 Cab Height	2960	2960	2960	2960	2960
Cab Height with Top Guard	3152	3152	3152	3150	3152
10 Counterweight Clearance**	1020	1020	1020	1020	1020

*Including shoe lug height.

**Without shoe lug height.